

WM LIGHT-R

LOADING RAMP SUITABLE FOR PASSENGER TRANSPORT. THIS RAMP FEATURES AN ALUMINIUM MESH PLATFORM FOR GOOD REAR VISIBILITY.

LOAD CAPACITY: UP TO 300 KG



LOAD CAPACITY
300 kg



CUSTOMISED DIMENSIONS

Width 80 and 100 cm
Length from 150 to 325 cm




HANDLING
Removable



COLOUR
blue




Aluminium mesh platform



Safety edges (6cm)




Two wheels for easy deployment



Movable contact flap to connect to the van floor





DEPLOYMENT AND SWIVELLING: An external swivel kit is supplied on request, making it possible to open the ramp in the vertical direction, like a second door. This system makes it possible to gain access to the van's cargo area without using the ramp (e.g. for loading pallets with a forklift truck).


REMOVABILITY AND TRANSPORT: The ramp can be easily removed from the vehicle by means of the side handles. Once the ramp has been removed, the vehicle cargo area is completely unobstructed. A quick coupling and release system allows the ramp to be transferred from one vehicle to another extremely quickly.

OPTIONAL EXTRAS

EXTERNAL SWIVEL KIT



Swivel kit that makes it possible to rotate the ramp through 90° toward the exterior of the van. This system makes it possible to gain access to the van's cargo area without using the ramp (e.g. for loading pallets with a forklift truck).



FIXED INSTALLATION

A fixed base can be mounted to the ramp on request. This means the ramp becomes fixed and can no longer be removed from the van. This solution simplifies and streamlines installation operations, which can be performed in approximately 30 minutes.

APPLICATION SECTORS




DISABLED USERS
PASSENGER
TRANSPORT

GANGWAY CONFIGURATION



Thanks to a special pin that locks the hinge, the ramp can be used in gangway mode to connect two surfaces at different heights (vehicles and steps, loading docks, etc...)

EXAMPLE MODELS	A (mm)	L (mm)	L2 (mm)	H (mm)	P (mm)	P1 (mm)	P2 (mm)	Capac. (Kg)	Weight* (Kg)
LIGHT-R 80	1750	1100	800	960	203	345	60	300	44
LIGHT-R 80	2000	1100	800	1085	203	345	60	300	48
LIGHT-R 80	2250	1100	800	1210	203	345	60	300	58
LIGHT-R 80	2500	1100	800	1335	203	345	60	300	56
LIGHT-R 80	2750	1100	800	1460	203	345	60	300	60
LIGHT-R 80	3000	1100	800	1585	203	345	60	300	64
LIGHT-R 80	3250	1100	800	1705	203	345	60	300	68
LIGHT-R 100	1750	1300	1000	960	203	345	60	300	46
LIGHT-R 100	2000	1300	1000	1085	203	345	60	300	50
LIGHT-R 100	2250	1300	1000	1210	203	345	60	300	55
LIGHT-R 100	2500	1300	1000	1335	203	345	60	300	60
LIGHT-R 100	2750	1300	1000	1460	203	345	60	300	65
LIGHT-R 100	3000	1300	1000	1585	203	345	60	300	69
LIGHT-R 100	3250	1300	1000	1705	203	345	60	300	74

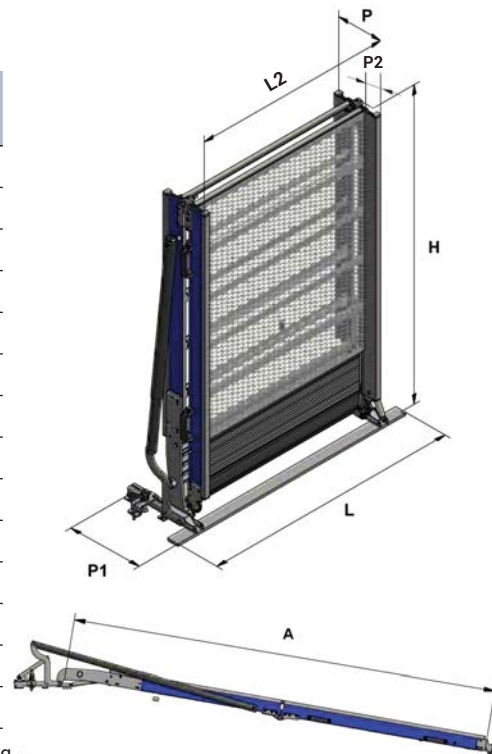

* The specified weight does not include the installation kit, 5 kg. The external swivelling optional weighs +6 kg